
# Regulatory Buoys • ABS type – 9" Dia.

Approved and universally used by local, state and federal agencies to ensure water safety. Ideal for private applications.

# UNSINKABLE — filled with urethane foam



## Specify desired symbols and messages when ordering.

| Submerged buoyancy            | 84 lbs.      |
|-------------------------------|--------------|
| Net weight                    | 49 lbs.      |
| Shipping weight               | 56 lbs.      |
| Refer to installation suggest | ions on page |
| 22. See warranty information  | n on inside  |
| back cover.                   |              |

### Model B1147R


#### Features

- Easy reconditioning of weather-worn buoys with excellent adhesion of restoration materials. See page 18.
- 9" diameter, white, ABS plastic exterior. Will not rust, chip or peel. Ultraviolet inhibited.
- Completely urethane foam filled. Virtually unsinkable.
- 3"-wide reflective band at top provides excellent nighttime visibility.
- Self-righting without tackle.
- · Recessed cap allows buoy to stand upright.
- Heavy steel galvanized anchoring eye cast in an internal concrete ballast.
- Includes choice of standard symbols and messages.

#### **Available Options**

- Pickup eye built into top.
- Stainless steel anchoring eye for salt water applications.
- Agency or name identification.
- Cone cap top.
- Special non-standard messages.
- ½" PVC pipe thru for float line applications.
- Solar lights (see page 11).
- · Available in yellow.




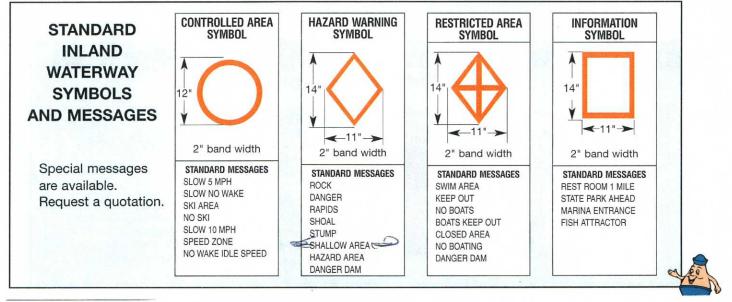



# **Regulatory Buoys** • X-Tra Heavy Duty

Super-tough regulatory buoy. Designed for problem areas where buoys are subject to abuse and vandalism.

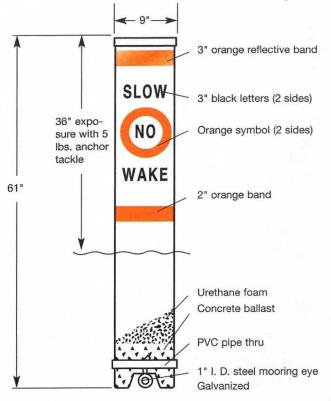

When ordering, specify symbols and messages desired (see bottom of page 1).

| Submerged buoyancy | 84 lbs. |
|--------------------|---------|
| Net weight         | 49 lbs. |
| Shipping weight    | 56 lbs. |

Refer to installation suggestions on page 21. NOTE: Special procedures must be followed when reconditioning HDPE type buoys.

See warranty information on inside back cover. \*HDPE = High-Density Polyethylene

### HDPE\* Type - 9" Dia.

#### Model B961R




- 9" dia. white super-tough HDPE shell. Ultraviolet inhibited.
- Shatter-proof will not crack, chip, peel or rust.
- · Completely urethane foam filled. Virtually unsinkable.
- 3"-wide reflective band at top provides excellent night visibility.
- Self-righting without tackle.
- Recessed cap allows buoy to stand upright.
- Heavy steel galvanized anchoring eye cast in an internal concrete ballast.
- · Inland waterway marking symbols with standard messages included.
- Includes choice of standard symbols and messages.

#### **Available Options**

- Pickup eye built into top.
- Stainless steel anchoring eye for salt water applications.
- Agency or name identification.
- Special non-standard messages.
- Solar light (see page 11).
- · Cone cap top.

### **EDUCATIONAL BUOYS • MINIATURE REPLICAS** Non-functional-for educational use only.

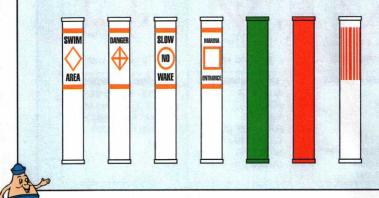

### Model B2510ES

- 2½" dia. x 10" identical replicas of Rolyan® regulatory buoys showing standard inland waterway symbols and messages. Set of seven buoys includes:
- Swim Area/No Boats
- Danger/Hazard
- · Slow No Wake/ No Wake Idle Speed
- Marina Entrance
- Red Channel Marker
- Green Channel Marker
- Centerline Marker Red & White (Black & White label included)

